



PLESK 7

DOMAIN USER'S MANUAL

Distribution of this work or derivative of this work in any form is prohibited unless prior written permission is obtained from the copyright holder.

Linux is a registered trademark of Linus Torvalds. RedHat is a registered trademark of Red Hat Software, Inc. All other trademarks and copyrights are the property of their respective owners.

13800 Coppermine Road, Suite 112, Herndon, VA, 20171 USA, Ph.: 703 815-5670, Fax.: 703 815-5675

Table of Contents

1. About Plesk 7	1
Plesk 7 Capabilities	1
Plesk Interface Specific Features	2
2. Performing Administrative Tasks	5
Editing Your Account Information and Password	5
Setting Up Interface Preferences	5
Managing Trouble Tickets	6
Managing User Sessions	7
3. Administering Your Domain	9
Managing Hosting	9
Editing Traffic Statistics Retention Settings	11
Viewing Resource Usage Limits	12
Viewing the Domain Report and Statistics	12
Viewing DNS Settings	14
Managing Mail	14
Managing Mailing Lists	25
Registering a Domain with MPC	28
Accessing Additional Services (Extras)	28
Managing Databases	28
Domain SSL Certificates Repository Management	31
Managing Tomcat Web Applications	36
Managing Web Users	40
Managing Subdomains	42
Managing Protected Directories	43
Managing Anonymous FTP Access	46
Managing Log Files and Log Rotation	48
Scheduling Crontab Tasks	50
Using File Manager	52
Using the Domain Application Vault	54
Accessing Site Builder	55
Accessing Microsoft FrontPage Web Administrator	55
Backing Up and Restoring Domains	56
A. Glossary of Terms	59

Chapter 1. About Plesk 7

Plesk is a complete hosting automation solution specifically designed to allow simplified management of a Linux based server. It delivers the stability demanded by Hosting Service Professionals while providing the self administration interfaces and end user access for mail, domain, reseller and server level administration.

Plesk lets non-technical personnel perform a wide variety of administrative tasks — from creating new e-mail accounts to managing entire domains — all with point-and-click simplicity.

Plesk 7 Capabilities

Plesk provides four tiers of administration: admin, client, domain, and mail name user. All can perform various tasks at remote locations via any standard Internet browser. Being a Domain user, you are provided with the following management capabilities:


- View domain statistics, and DNS zone settings.
- Manage subdomains
- Access domain registration and management services, SSL certificates and domain tools offered by MyPlesk.com
- Back up/restore domain data
- Manage mail accounts and mailing lists, enable spam filtering
- Create, edit, and delete domain web users, set up scripting capabilities
- Create, edit, and delete protected directories, manage the directory users, set up access with SSL or standard http
- Set up FTP services
- Manage databases: create, edit, and delete multiple databases and manage database users
- Manage SSL certificates.
- Deploy and manage domain applications
- Operate files and directories using the File Manager
- Access FrontPage (and FrontPage over SSL) directly from the control panel
- Manage log files and configure log rotation options
- Schedule and manage Crontab tasks
- Manage user sessions
- Use the Trouble Ticketing System to get technical assistance.

Plesk Interface Specific Features

This section focuses on description of the specific features of Plesk web-based interface.

Navigation

The control panel interface is divided into two main parts. The navigation pane occupies the left part. In the right part you can operate particular Plesk component selected from the navigation pane.

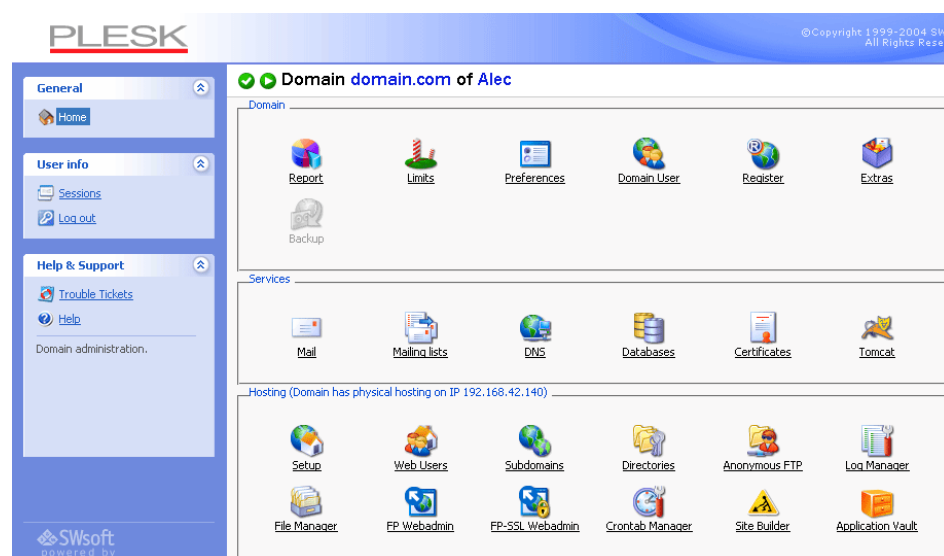

- The Home shortcut opens your Home page (also referred to as the Domain administration page), which gives you access to major administrative functions available for your account.
- The Sessions shortcut is used for managing currently active user sessions.
- The Log out shortcut ends your control panel session.
- The Trouble Tickets shortcut takes you to the trouble ticketing system interface.

Pathbar

When you start your Plesk session, the path (chain of links) appears in the right part at the top of the screen. These links reflect your actual “location” within Plesk system. By clicking on the links, you can be one or more (depending on your “location”) levels up.

You can also use the Up Level button located at the upper right corner of the screen to go one level up or return to the previous screen.

Help

The Help shortcut located in the navigation pane provides you with context help. A help page is displayed in a separate window.

Below the Help shortcut is the area displaying a short context help tip. Basically, it provides a brief description of the current screen or operations available. When you hover the mouse pointer over a system element or status icon, it displays the additional information.

Working with Lists of Objects

You may have considerable number of objects within Plesk system. In order to facilitate working with the different lists of objects (for example, list of subdomains), the special tools are provided: Search and Sorting.

To search in a list, enter a search pattern into the Search field, and click Search. All matching items will be displayed in a reduced list. To revert to the entire list of objects, click Show All.


To sort a list by a certain parameter in ascending or descending order, click on the parameter's title in the column heading. The order of sorting will be indicated by a small triangle displayed next to the parameter's title.

Chapter 2. Performing Administrative Tasks

This chapter focuses on administrative tasks you perform within your Plesk environment.

Editing Your Account Information and Password

To change the information in your account, or password:

1. Click the  Domain User icon at the Domain administration page.
2. Enter the password in the Password text box, and then re-enter it in the Confirm Password text box.
3. Supply the personal and contact information in the fields provided.
4. Click OK.


If you forget your password

If you forget your password, you can use the password reminder feature available from the control panel login screen.

Setting Up Interface Preferences

You can choose to set such properties of the Plesk user interface as the interface language, skin, and allow/disallow multiple sessions under your login.

To change the interface preferences, follow these steps:

1. Click the  Domain User icon at the Domain administration page.
2. Select the desired interface language and skin for your sessions.
3. To allow multiple simultaneous control panel sessions under your login name, select the Allow multiple sessions checkbox.
4. Click OK.


Managing Trouble Tickets

To submit a new trouble ticket, follow these steps:

1. Select the Trouble Tickets shortcut in the navigation pane. The trouble ticketing system interface will open displaying the list of existing tickets. The list is empty when there are no tickets submitted:


Tickets

Tools


 Add New Ticket

Tickets

No Tickets.

2. Click  Add New Ticket. The ticket submission page opens:

Tickets >

New Ticket  Up Level

Ticket

Ticket Subject *

Category


Ticket Body *

* Required fields

3. Enter ticket subject, select the category the issue is related to, and type in the problem description.
4. Click OK. The ticket is now submitted to the system, and the appropriate record is added to the list:

Tickets


Tools

 Add New Ticket

Tickets

Tickets (1)

Search

Id	Ticket Subject	Ticket Status	Reporter Type	Reporter Name	Modified	Category
1	TTS - That thing does not work!!!	New	 Domain	domain.com	Nov 9, 2003 05:29 AM	Mail

To change the status of a ticket or add a comment:

1. On the page listing tickets, click on a ticket id or subject. The page will open displaying all comments made to the ticket, and allowing you to change the ticket properties and add new comments:

Ticket 1 Up Level

Ticket

Ticket Status	New
Ticket Subject	TTS - That thing does not work!!!
Category	Mail

New Event

Ticket Event	Comment ticket
New Comment *	<input type="text" value="I need to get this fixed ASAP."/>

* Required fields OK Cancel

Ticket History

Nov 9, 2003 05:29 AM	domain.com <>
I need some qualified assistance...	

2. To add an event to the ticket, i.e. close, reopen and/or comment it, select a corresponding action in the Ticket Event drop-down box, type a new comment into the New Comment input field if required.
3. Click OK to submit all changes.

Managing User Sessions

You can monitor and manage the currently active user sessions from the control panel. To access the user sessions management functions, select the Sessions shortcut in the navigation pane. The current user sessions will be presented in the list:

Sessions Management

Sessions

Sessions (2)

Search Show All Refresh Remove Selected

T	Login	IP Address	Logon time	Idle time
	domain.com	192.168.42.44	Nov 9, 2003 04:32 AM	00:00:01 <input type="checkbox"/>
	domain.com	192.168.42.29	Nov 9, 2003 05:51 AM	00:00:27 <input type="checkbox"/>

The icon in the T (Type) column identifies a control panel user who established the session. The Login column displays the user's system login, IP address indicates the ip the control panel is accessed from, the Logon time and Idle time columns display the date and time the session was initiated, and the session

idle time respectively.

Click Refresh to refresh the list of user sessions.

To end a user session, select the corresponding checkbox and click Remove Selected. Note that you cannot remove your own session this way: the checkbox appears disabled.





Chapter 3. Administering Your Domain

This chapter focuses on domain administration tasks you perform within your environment. Follow the instructions provided in this chapter to learn how to manage services for your domain.

When you log in to your Plesk account, you access the Domain administration page, which displays the domain status information and provides access to various domain management functions.

The domain properties are represented by the following icons:

Table 3.1. The domain properties icons

Icon	Meaning
The state icon indicates the system state of the domain:	
	means that the domain is operating within defined disk space and traffic limits
	means that the disk space or traffic limitations are exceeded on the domain. The Plesk system evaluates disk space and traffic every 24 hours
The status icon indicates if the domain is active or disabled:	
	means that the domain is active
	means that the domain is presently deactivated and inaccessible

Managing Hosting

Using Plesk you can select any of three different types of hosting services, as listed below:

- Physical hosting: the most common type of hosting service, creating a virtual host (disk space on the local server). Users control and publish their own web site without having to purchase a server and dedicated communication lines.
- Standard forwarding: with this type of forwarding, all requests to the domain are forwarded by the server to another Internet address (no virtual server is created). When an end user searches the Internet for your domain, he is routed to another URL, and the address in his browser window changes to

the new URL.

- **Frame forwarding:** all requests to this domain are forwarded to another Internet address (no virtual server is created). But with this type of forwarding, the end user sees your domain name in his browser, not the forwarding address. Plesk uses frames to 'trick' the browser into displaying the correct domain name. The problem with this type of forwarding is that some search engines do not index these frame pages and some browsers do not support frames.

Configuring Physical Hosting

As a domain user, you cannot set up physical hosting, however you can view the physical hosting account settings, change FTP password and FrontPage authorization mode. To do it, follow these steps:

1. Click the Setup icon on the Domain administration page. The Physical Hosting Setup page appears.
2. Enter the new FTP password, and confirm it in the appropriate fields.

NOTE

The maximum FTP user name length should not exceed 16 symbols, which is required for compatibility purposes. As the FreeBSD operating system does not support user names longer than 16 symbols, the users who are running RedHat Linux and having names longer than 16 symbols (as allowed by RedHat Linux OS) and willing to migrate to FreeBSD would encounter certain problems during restoring of data backed up on RedHat Linux.

You cannot use the reserved system words, such as "mailman" for user names.

3. You can authorize or disable remote editing of the web site using Microsoft FrontPage. To activate Microsoft FrontPage authorization, set the FrontPage authorization option to Enabled. If you want to turn off Microsoft FrontPage authorization, select the authorization Disabled option.
4. Click OK.

Configuring Forwarding Hosting

Configuring Standard Forwarding

To set up standard forwarding, follow these steps:


1. Click the Setup icon on the Domain administration page. The Hosting type selection page appears.
2. Select the **standard Forwarding** radio button. Click OK. The standard forwarding assignment page appears.
3. Click in the Destination URL text box and enter or edit a URL address. Users will be redirected to this address when they access your domain on the web. The URL change will be visible in the browser.
4. Click OK to save changes.

Configuring Frame Forwarding

Follow these steps to configure frame forwarding:

1. Click the Setup icon on the Domain administration page. The Hosting type selection page appears.
2. On the Hosting Type Selection page, select the **Frame Forwarding** radio button. Click OK. The frame forwarding assignment page appears.
3. Click in the Destination URL text box and enter or edit a URL address. Users will be redirected to this address when they access your domain on the web. The URL change will not be visible in the browser.
4. Click OK.


Deleting Hosting Configuration

You can change hosting type for a domain only after you delete the hosting configuration. To delete the current hosting configuration, use the 

Delete icon, located at the Domain administration page, Hosting group.

Editing Traffic Statistics Retention Settings


To adjust the traffic statistics retention time, follow these steps:

1. Click the  Preferences icon at the Domain administration page.
2. To set the traffic statistics retention period, select the Retain traffic statistics for Months checkbox, and type the number in the input field provided.

3. Click OK.

Viewing Resource Usage Limits

You can check the limits for resource usage and the domain validity period defined by the administrator or service provider. To do that:


1. Click the  Limits icon on the Domain administration page. The Domain limits page will appear containing the list of resource limits.
2. Click Up Level to return to the Domain administration page.


Viewing the Domain Report and Statistics

To view the domain report, click the  Report icon on the Domain

administration page. The report will open, giving you access to miscellaneous statistical data.

To get a printer-friendly version of report, use the  icon.

To send the report by e-mail, enter the email address into the input field and click the  icon.

To view the traffic history, click the  Traffic History icon.


To view the statistics on traffic used by the domain services, click



Traffic.


To view the hits statistics, select the  Web Stats icon or  Web

Stats SSL icon.

To view the FTP server statistics, use the  FTP Stats icon. To view the

information on anonymous FTP, use  Anon.FTP Stats.

Customizing a report layout

You can define which sections of the domain report will be displayed. To this effect, on the domain report page, click the  Customize icon. The Custom report layouts page will open displaying the list of currently existing report layouts:

Custom report layouts [Up Level](#)

Tools

 Add New Report

Reports

Reports (1)

[Search](#) [Show All](#) [Remove Selected](#)

Name ▲	General	Hosting	Web users	Mail names	Mailing lists	Databases	Web applications	Site Applications	
Summary report	Summary	Summary	Summary	Summary	Summary	Summary	Summary	Summary	<input type="checkbox"/>

To add a new custom layout, follow these steps:

1. Click the  Add New Report icon. The page appears:

Create report [Up Level](#)

Report form

Report name *

General None Summary

Hosting None Summary

Web users None Summary Full

Mail names None Summary Full

Mailing lists None Summary Full

Databases None Summary Full

Web applications None Summary Full

Site Applications None Summary Full

Use as default report

* Required fields

2. Enter the report layout name in the Report name field.
3. For each section of the report, define the amount of data that will be presented.
4. To use this layout by default, select the corresponding checkbox.
5. Click OK.

To remove a custom report layout, select it using the corresponding checkbox, and click Remove Selected.

To edit a custom layout, select its title in the list.

Viewing DNS Settings

To view the DNS zone records, defined by the administrator for your domain, on the Domain Administration page click the



DNS icon.

Types of DNS Records

There are five types of available DNS records:

A = Address - This record is used to translate host names to IP addresses.

CNAME = Canonical Name - Used to create additional host names, or aliases, for hosts in a domain.

NS = Name Server - Defines an association between a given domain name and the name servers that store information for that domain. One domain can be associated with any number of name servers.

MX = Mail Exchange - Defines the location of where mail should be delivered for the domain.

PTR = Pointer - Defines the IP address and host name of individual hosts in the domain. Translates IP addresses into host names.


Managing Mail

You can use the following e-mail administration functions in Plesk:



- Create, edit or delete e-mail boxes and set individual mailbox quotas.
- Allow mail user access to the control panel.
- Use several mail aliases for a single mail name.
- Set up redirection of mail addressed to the mail name to another e-mail address.
- Enable the mail name to function as a mail group used for forwarding mail to a number of e-mail addresses at once.
- Manage mail group membership for the mail name
- Set up autoresponders: automatic replies to e-mail sent to the mail name.
- Configure the integrated anti-spam software for filtering incoming mail.

Managing Mail Names




When you create e-mail accounts for users, you create e-mail boxes, which will

be accessible via POP3 or IMAP protocols. Mailbox creation is as easy as typing in a name and password. Click the  Mail icon at the Domain

administration page to access the Mail Names Management functions:





 Mail names for domain enoemos.vrh73.plesk.ru  Up Level






Tools



 Add New Mail Name  Disable  Preferences

Mail names


Mail names (1)

 Search  Show All  Show Aliases  Remove Selected


L	B	R	G	A	Name ▲	<input type="checkbox"/>
					enoemos	<input type="checkbox"/>

From this page, you can enable/disable the mail service for the domain. To this effect, click the  Enable or  Disable icon respectively.

You can allow the use of web-based e-mail for the domain through webmail.'domain name' and set up a mail bounce message or a catch-all e-mail address for invalid (nonexistent) user names. These items are used to handle mail that is received for this domain for a mail account that has not been created within the domain:

1. Click  Preferences
2. To utilize a mail bounce message select the radio button for Bounce with phrase and enter the appropriate text.
3. To utilize a catch-all e-mail address, select the radio button for Catch to address and enter the appropriate e-mail address.
4. Check or uncheck the WebMail checkbox to allow or disallow the use of web-based e-mail for the given domain through webmail.'domain name'.
5. Click OK to submit the changes.

To create a new mail name, follow these steps:

1. Click  Add New Mail Name. The mail name creation page will open:

Create mail name [Up Level](#)

Mail name form

Mail name * @ enoemos.vrh73.plesk.ru

Old password NONE

New password

Confirm Password

Control panel access

Interface language

Interface skin

Allow multiple sessions

Mailbox






Mailbox quota Default for the domain (Unlimited)
 Enter size KBytes

Enable spam filtering

* Required fields

2. Enter the desired name into the Mail name field and specify a password that will also be used by the mail user to access the control panel.
3. To allow the mail user access to the control panel, click the Control panel access checkbox, and select the interface language and skin from the drop-down boxes. Check the Allow multiple sessions checkbox to allow multiple sessions under the same mail user's login.
4. To create a mailbox, select the Mailbox checkbox, specify the mailbox quota if desired, and enable the mail filtering using the Enable spam filtering checkbox if you want the mail to be filtered by server.
5. Click OK to submit all changes.

After the mail name is created, it appears on the Mail Names list, accompanied by five icons:

-  indicates the mail user access,
-  represents a mailbox,
-  represents a mail redirect
-  represents a mail group
-  represents a mail autoresponder


These icons are displayed in gray when they are not active, and appear in color when active. To edit mail name account settings select a mail name or click on an icon corresponding to the service you wish to configure.

To switch to displaying the mail aliases for the mail names in the list, click the Show Aliases button, to hide them use the Hide Aliases button.

To remove one or several mail names, check the checkboxes in the mail names list, corresponding to the mail names you wish to remove and click Remove Selected.

Enabling Mail Services










When you click on a mail name, you access the mail name properties page, which allows setting up any combination of services for a mail name: Mail alias, Mailbox, Redirect, Mail Group, Autoresponder, and Spam Filter.

1. Click the  Mail icon at the Domain administration page. The Mail Names page appears.






2. Click on the mail name you wish to edit. This takes you to the Mail Name Properties page:

mail@asd.vrh73.plesk.ru [Up Level](#)

Tools

 Add New Mail Alias	 Preferences	 Mailbox	 Redirect	 Mail Group	 Groups
 Autoresponders	 Spam Filter	 Webmail			

Info

Control panel access	 On	Mailbox	 On
Redirect	 Off	Autoresponders	 Off
Mail group	 Off		

Mail aliases

No Mail aliases.

3. To set up or configure a mail service for the mail name, click on a corresponding icon (button) in the Tools group or select a shortcut in the Info group.

The Mail Aliases area lists the aliases created for the mail name. To add new mail alias, click the










Add New Mail Alias icon.

To edit an alias, click on its title. To remove an alias, select it using a corresponding checkbox, and click Remove Selected.

4. To edit properties of the mail name, such as interface language and skin, change password, allow multiple sessions, click



Preferences.

5. To edit mailbox quota and enable spam filtering, click  Mailbox.
6. To set up mail forwarding - a redirect, click  Redirect.
7. To enable a mail group service for the mail name and add new members to the mail group, click  Mail Group.
8. To manage mail groups membership, click  Groups.
9. To manage autoresponders and autoresponder attachment files, click  Autoresponders.
10. To manage personal spam filtering settings, click  Spam Filter.
11. To manage your mail box via Webmail interface, click  Webmail.

Mailbox

Using this function, you can set up mailbox quota and enable spam filtering:

1. When on the mail name properties page, click on the Mailbox icon
2. To enable the mailbox, select the Mailbox checkbox.
3. To set up the mailbox quota, select the Default for domain radio button to set the limit to the maximum available for the given domain, or select Enter size and enter the quota you wish to set, in Kilobytes, for the given mailbox. Note that this limit may not exceed the default set for the domain.
4. Select the Enable spam filtering checkbox, to enable mail filtering based on your personal settings.
5. Click OK to submit your changes.

Once enabled, the mailbox icon on the Mail Names page appears in color.

Managing Mail Redirects

You can forward or redirect email from one mailbox to another email address. By creating an email redirect or alias, messages are sent to a different email box without requiring the sender to know the new address. Email can be redirected to an address outside the domain. Use this redirect feature to:

- Temporarily forward mail when the person who owns the mailbox is unavailable.
- Send mail to a new mailbox if a mailbox user is leaving the company.
- Forward mail to a new account, which will eventually replace an old mailbox. (e.g. someone is changing their name but hasn't had time to inform all correspondents of the change yet).

In order to enable and set a redirect for the mail name, follow these steps:

1. On the mail name properties page, click the Redirect icon.
2. Select the Redirect checkbox, and in the text box to the right, enter the appropriate address that you wish mail for this mail name to be forwarded to.
3. Click OK.

Once enabled, the Redirects icon on the Mail Names page appears in color.

Managing Mail Groups

A mail group is a list of several email accounts that are grouped together under one email address. This feature enables sending one message to multiple recipients at once. For example, if you want to send the same message to five people in the technical support department, you can create a "Support" email group that includes the individual email addresses for all five staff members. When someone sends a message to mail group "Support", he/she only types and sends one message, but copies of the message go to all five individuals. The sender does not need to know the addresses for all five individuals, just the group name. Essentially, mail groups help save time and effort.

In order to enable and set up a mail group for the mail name, follow these steps:

1. On the mail name properties page, click the Mail Group icon.
2. Before enabling the mail group, you need to add at least one mail group member. Click Add New Member.
3. Enter the desired external e-mail address into the E-mail input field and/or

select one or more of the listed mail name accounts using checkboxes, and click OK.

i NOTE

Group members can consist of either external mail addresses (those not belonging to this domain) or accounts, which exist within the domain.

4. The selected addresses will appear in the list of Mail group members on the Mail Name Properties page.
5. To delete one or several group members, select the corresponding checkbox and click Remove Selected.

Once enabled, the mail group icon on the Mail Names page appears in color.

Clicking on the Groups button you will access the Mail Groups Management page.

All mail groups created for the domain are displayed on that page and two lists are presented: the list of mail groups you are currently subscribed to is located on the right side, and the list of available mail groups is on the left.

i NOTE

If you are removing a mail name from a mail group, and this is the last member in this group, then this group is deactivated. The name of the group is no longer listed in the list of groups available for adding.

- If you wish to subscribe to a new mail group, select the desired group from the list of available mail groups, and click Add>>.
- If you wish to unsubscribe from a mail group, select it in the right side list, and click <<Remove.
- Click Up Level to return to the Mail Name properties page.

Managing Mail Autoresponders

A mail autoresponder is an automatic reply that is sent out from a given mail name when incoming mail is received at that address. Autoresponders can include both a text message and attached files. This mail function is often used on mail accounts for individuals who need an automated response because they are away, or are unable to check their mail for any number of reasons. In the autoresponders management section you can upload and include attachment files for your autoresponders, enable the autoresponder function for

a given mail name, and access the list of autoresponders.

Attachment files repository

For the autoresponder feature you have the option to include file attachments. To include a file to be selectable within the set up of autoresponders for the given mail name, use the Attachment Files icon available from the Autoresponders management page. The Attachment files repository page opens. It allows you to upload files and remove them.

To upload a file, specify the path and filename in the File name field, and click Send File. The attachment will then appear in the Repository.

These files will be available for any autoresponders that are set up for the given mail name. To delete one or more files, select the checkboxes related to the files you wish to remove, and click Remove Selected button.

In order to enable and set up a mail autoresponder for the given mail name, follow these steps:

1. On the mail name properties page, click the Autoresponders icon. Autoresponders management page will open.
2. Click Add New Autoresponder. The autoresponder creation/editing page will open.
3. Enter the name into the Autoresponder name field.
4. Below the Request text input box, you can determine whether an autoresponder responds to specific text or set of characters found within either the subject line or body of the incoming email, or if it responds to ALL incoming requests. Type the phrase or a set of characters in the Request text input box, and select the appropriate radio button to enable checking **in the subject** or **in the body**.
5. To set up the autoresponder to always respond, regardless of the contained text, click the bottom radio button for always respond.
6. You can select a specific subject to appear in your automatic reply using the Answer with subject option. To simply respond with the same subject as was received from the incoming request select the radio button for the default setting. To specify a certain subject line select the radio button beside the text box and enter the desired text.
7. In the Return address field, you can specify the return address that will be set up in the autoresponder message. This is done for the messages not to be directed to the autoresponder itself, when users use the "Reply to the

message" function in their mail client software.

8. You can enter text to be included into the autoresponder in the Reply with text field.
9. Using the Add New Attachment button, you can attach files to be included in the autoresponder. These files must be uploaded into the Repository on the Mail Names Properties page. Select the uploaded file from the Attach files list, and use the Add New Attachment button to attach the file to the autoresponder. To remove an attached file, select the corresponding checkbox, and click Remove Selected.
10. You can limit the frequency at which the autoresponder responds to the same unique address, after receiving multiple emails from it. In the Reply to the unique email address not more than [] times a day input field, you can set the autoresponder to respond no more than a specified number of times per day. The default setting is to respond not more than 10 times in one day to unique mail addresses.
11. You can define the number of unique addresses that the autoresponder will remember. Enter the desired number in the Store up to: field. This memory enables the system to control response frequency. In the event of extremely high mail volume, to protect server performance, you can limit the address memory of the system database.
12. To specify an email address to which incoming requests are forwarded, enter the new e-mail in the Forward request to e-mail field. Email requests meeting the requirements established on this page will be forwarded to this alternate e-mail address.
13. Click OK to submit all changes.
14. Click the Enable button to enable the autoresponder service.

Managing the spam mail filter settings

Plesk allows for setting up and using black lists and white lists for filtering mail at the server level as well as at the user level.

The user level spam filter functionality is available for each specific mail name configured as a mailbox. That means that the Mailbox functionality should be activated for the selected mail name.

If the spam filtering functionality is enabled for users by the Administrator, it should first be activated. To do that:

1. Go to the selected Mailbox management page (select the mail name and click the Mailbox icon, Tools group);

2. Check the Enable spam filtering checkbox;
3. Click OK to save changes.

You will see the Spam Filter icon become active (displayed in color), meaning that the spam filtering functionality is now available for this mail name. If the spam filtering functionality was not enabled for the users by the Administrator, the Enable spam filtering checkbox at the Mailbox management page will be inactive and the Spam Filter icon will also be inactive (displayed in gray).

Click on the Spam Filter icon to access the Spam filter configuration page, where you can set the filtering rules for the selected mail name.

If the Administrator has set up and activated mail filter at the server level, all the incoming mail will be processed with it before it reaches the users' mailboxes. You can choose to use or, on the contrary, not use the server wide settings for your mail. If you decide not to use the server wide settings, those will be disregarded and your mail will be processed only according to the configuration you set at the user level.

1. To use (not use) the server wide mail filtering settings, check (uncheck) the Use server wide settings checkbox;
2. Click Set to save the changes.

In order to recognize a mail message as spam it needs to score a certain amount of hits. The hits are scored according to the internal SpamAssassin settings and based on the contents of the mail messages and its subject. You can change the sensitivity of the spam filter by varying the amount of hits required for marking a message as spam. The more hits are required the less sensitive the filter is, and vice versa – the less hits are required the more sensitive the filter is.

1. The default amount of hits is set to 7. If you wish to change this value, click into the Hits required for spam input box and type in the new value.
2. Click Set to save the changes.

You can choose what to do with the mail recognized as spam: you can choose to either delete it, or to mark it as spam and leave it in the mailbox.

1. Select the Delete radio-button to delete mail recognized as spam, or the Mark as spam and store in mailbox radio-button to leave the mail marked as spam in your mailbox;
2. Click Set to save the changes.

If you decide to leave the mail recognized as spam in your mailbox such messages will be marked correspondingly so that they can be easily visually identified. In particular, a special string is added to the subject of the message

(e.g., by default the string *****SPAM***** will be added to the spam messages subjects). You can change this string (or tag) to whatever you like, or even to disable this option.

1. In order to activate/deactivate the option of modifying the spam messages subject, check the Modify spam mail subject;
2. To change the text of the string, click into the input field and enter the new text;
3. Click Set to save the changes.

Black list is a list of E-mail addresses, which are automatically considered as sending unsolicited mail – spam. Therefore, all messages coming from the E-mail addresses that match those specified in the black list will automatically be marked as spam.

You can add to the black list either exact E-mail addresses or patterns, using wildcards (*, e.g.: entry *@spammers.online.com will cause all messages coming from the domain spammers.online.com be marked as spam, regardless of what the exact mail name is).

1. Enter the E-mail address or pattern into the Email pattern input field;
2. Click Add to add the new entry to the black list, the new entry will appear in the user's black list section.

The Administrator's black list section contains the server wide black list entries that were added by the Administrator. If you chose to use the server wide filtering settings (the Use server wide settings checkbox checked) you may wish to edit this section by removing unnecessary entries. To do that, just select the Administrator's black list entry and click Remove.

White list contains E-mail addresses, which are automatically considered as trustworthy. Therefore, all messages coming from the E-mail addresses that match those specified in the white list will never be marked as spam.

You can add to the white list either exact E-mail addresses or patterns, using wildcards (*, e.g.: entry *@your-company.com will cause all messages coming from the domain your-company.com not be marked as spam, regardless of the content of a message).

1. Enter the E-mail address or pattern into the Email pattern input field;
2. Click Add to add the new entry to the white list, the new entry will appear in the user's white list section.

The Administrator's white list section contains the server wide white list entries that were added by the Administrator. If you chose to use the server wide filtering settings (the Use server wide settings checkbox checked) you may wish

to edit this section by removing unnecessary entries. To do that, just select the Administrator's white list entry and click Remove.

You can train your mail filters on actual messages you receive. Click the Training icon in the Tools group to access the Spam filter training page. The headers for all mail that comes to your mailbox will be listed here. Each such header you can select to mark as spam, ham (good mail) or forget.

- Marking a header as spam will result in recognition of same or similar mail as spam;
- Marking a header as ham will result in recognition of same or similar mail as not spam;
- Option forget clears the database of any rules (spam or ham) previously set for this header.


Once you select one of the options, appropriate rules will be added to the spam filter database, which will allow in the future to recognize messages similar to the ones it was trained on, and make decisions regarding whether a message should be considered spam or not based on that.

Use the Clear button if you want to clear the spam filter's database.

Click OK to save the changes and return to the Spam Filter page.

This concludes setting up the user level spam mail filter. All the incoming mail for the selected mail name will be processed according to these settings.






Managing Mailing Lists

You can create and manage mailing lists via Plesk. Click the  Mailing

lists icon on the Domain administration page to access the Mailing Lists Management functions: activating/deactivating the Mailing List service, adding, administering and removing mailing lists, enabling/disabling the selected mailing lists.

The status of Mailing list service and status of a Mailing list are represented by the following icons:



Table 3.2. The Mailing lists service/mailling lists status icons

Icon	Meaning
The Mailing lists service status	
	means that the Mailing lists service is activated
	means that this mailing list is presently deactivated.
The mailing list status	
	means that the mailing list is activated
	means that this mailing list is presently deactivated and inaccessible.
	the mailing list is disabled as the mailing lists service is disabled for the domain.

Activating/deactivating the Mailing lists service


In order to disable the support of mailing lists the Mailing lists service can be deactivated. When the mailing list service is deactivated, all mailing lists also change their status to 'deactivated' and therefore cannot be accessed.

NOTE



When the mailing list service is deactivated, the status icon will change to , and the status icons of the mailing lists at this domain will change to .

Activation of the mailing list service enables access to active mailing lists.

NOTE


When the mailing list service is activated, the status icon will change to , and so will the status icons of the mailing lists at this domain that were active before deactivating the mailing list service.

To activate/deactivate the mailing list service:


- Click the  Enable or  Disable icon respectively. The confirmation will appear querying whether you actually wish to change the status of the mailing list service.
- Click OK to proceed with changing the status.

Creating a new mailing list

To create a new mailing list, follow these steps:

1. On the mailing lists management page, click the  Add New Mailing List.
List.
2. Specify the mailing list name.
3. Specify the mailing list administrator's e-mail address, to notify the administrator of the mailing list creation, and check the corresponding checkbox to enable the notification.
4. Click OK to create a new mailing list.

Accessing the mailing list administration

The mailing list administration can be accessed by clicking on the icon  corresponding to the necessary mailing list. The mailing list administration software interface will open in a new browser window.

Removing mailing lists

You can remove one or several mailing lists at the same time. To remove a mailing list(s):


1. At the Mailing lists management page, select the checkboxes corresponding to the mailing lists you wish to remove.
2. Click Remove Selected. The Mailing lists removal page appears.
3. Confirm removal, and click OK.

Enabling/disabling mailing lists

You can enable/disable one or several mailing lists at the same time. To change the current state of a mailing list(s):


1. At the Mailing lists management page, check the checkboxes corresponding to the mailing lists you wish to change state.
2. Click the On/Off icon. The confirmation page appears.
3. Click OK. The state of the selected mailing lists will be changed.

Registering a Domain with MPC

You must officially register a domain and Internet address before you create it in Plesk. Plesk allows accessing the domain registration facilities provided through My.Plesk.com. To register a domain, click the  Register icon on

the Domain administration page. You will be taken to the MPC (My.Plesk.com) interface.

Accessing Additional Services (Extras)


From the Plesk control panel, you can access external services, such as third party solutions provided through My.Plesk.com. To do that, click the 

Extras icon on the Domain Administration page. You will be taken to the MyPlesk.com login page, where you will need to enter your login and password. You will then be taken to the Domain Tools area.

Managing Databases

With Plesk you can create multiple databases and multiple users within each database, and make use of DB WebAdmin - a web-based administration tool, allowing you to sort, edit, and create tables within a given database.


Creating a New Database

1. At the Domain administration page, click the  Databases icon. The

Databases Management page appears:

Databases for domain domain.com [Up Level](#)


Tools

 [Add New Database](#)

Databases

Databases (1)

[Search](#) [Show All](#) [Remove Selected](#)

T	Name ▲	
	base1	<input type="checkbox"/>

2. Click  Add New Database. The page appears:

Add New Database [Up Level](#)

[Add new database](#)

Database name

Type

* Required fields

3. Enter the desired name for the database, select the database type and click OK. The Database Users page appears:


Users for database database2 on domain domain.com [Up Level](#)

[Tools](#)

 [Add New Database User](#)

[Database users](#)

No Database users.

4. To add database users to the newly created database, click  Add

New Database User. The Database user addition page appears:

The database user addition for database2 database [Up Level](#)

[Database user](#)

Database user name

Old password NONE

New password

Confirm Password

* Required fields



5. Enter the user name into Database user name text box, specify a password in the New Password text box, and then enter it again in the Confirm Password text box. Select OK to complete the creation of new user.
6. Once you have completed the creation of the new database and its users click Up Level to return to the Databases Management page.
7. To add further databases, follow the steps outlined above.

Editing a Database

1. On the Databases Management page, click on the database name that you wish to edit. The Database Editing page appears:

Users for database database2 on domain domain.com [Up Level](#)

Tools

 [DB WebAdmin](#)  [Add New Database User](#)

Database users

Database users (1)

[Search](#) [Show All](#) [Remove Selected](#)

Name ▲	<input type="checkbox"/>
user2	<input type="checkbox"/>

2. To add database users to the selected database, click  Add New


Database User. The Database user addition page appears:

The database user addition for database2 database [Up Level](#)

Database user

Database user name	<input type="text"/>
Old password	NONE
New password	<input type="text"/>
Confirm Password	<input type="text"/>

* Required fields

3. Specify user name, enter new password in the New Password text box, and then re-enter it into the Confirm Password text box. Select OK to complete creation of the new user. Selecting Up Level will ignore all entries and return to the Database Editing page making no changes.
4. To edit the password of an existing database user, select the user from the database user list.
5. To delete existing database users select the users that you wish to delete using the corresponding checkboxes, and click Remove Selected.
6. To access and/or edit database content use the  DB WebAdmin function.
7. Once you are finished with editing the database and its users, click Up Level to return to the Database Management page.
8. To delete databases from the system, select the databases that you wish to delete using the checkboxes and click Remove Selected.
9. To edit further databases, follow the steps outlined above. To return to the Domain Administration page, click Up Level.

Domain SSL Certificates Repository Management

Plesk enables you to upload a Secure Socket Layer (SSL) Certificate, generate a Certificate Signing Request (CSR), and/or generate a Self-signed Certificate. Each certificate represents a set of rules used when exchanging encrypted information between two computers. Certificates ensure secure communications; this is especially important when handling e-commerce transactions and other private transmittals. Only authorized users can access and read an encrypted data stream.

Notes on Certificates:

- You can acquire SSL certificates from various sources. We recommend using the CSR option within Plesk. You can also purchase the certificate through the My.Plesk.com (MPC) web site.
- If using a SSL certificate issued by a certificate authority other than Thawte or Verisign, a rootchain certificate is required to appropriately identify and authenticate the certificate authority that has issued your SSL certificate.
- Once you have obtained a SSL certificate or a certificate part, you can upload it through Plesk using the instructions, which follow in this section.

IMPORTANT

When you add a certificate, it is not installed automatically onto the domain or assigned to an IP address, but only added to the Certificate repository. To install a certificate onto a virtual host, please contact the server administrator or service provider.

Accessing the Domain SSL Certificates Repository

To access the Domain certificates repository page, click the  Certificates

icon at the Domain administration page. The certificates repository page will open displaying the list of available certificates:

Certificates [Up Level](#)

Tools

[Add Certificate](#) [View Certs](#)

Find the appropriate private key to the certificate

Certificate

Certificates

SSL certificates (1)

R	K	C	A	Certificate Name	Used
				cert1	0

The four icons, preceding the certificate name in the list, indicate the present parts of a certificate. The icon displayed in the R column indicates that the Certificate Signing request part is present in the certificate, the icon in the K column indicates that the private key is contained within the certificate, the icon in the C column indicates that the SSL certificate text part is present and the icon in the A column indicates that CA certificate part is present. The number in the Used column indicates the number of IP addresses the certificate is assigned to.

Uploading a certificate file with finding the appropriate private key

After you have received your signed SSL certificate from the certificate authority you can upload it from the Certificate repository page. First make sure that the certificate file has been saved on your local machine or network. Use the Browse button to locate the certificate. Click Send File. The existing certificate with appropriate private key will be found and the certificate part will be added to the repository.


Changing a certificate name

To change a certificate name follow these steps:


1. At the certificate repository page, select a certificate from the list. You will be taken to the SSL certificate properties page.
2. Click in the Certificate name field and edit the name as desired.
3. Click Set.

Viewing purchased certificates

After you have purchased your certificates through the control panel you can

utilize the  View Certs function to view the information about your SSL certificate(s).


Downloading a certificate to the local machine

To download the certificate to the local machine, click on the  icon, corresponding to the required certificate. Select the location when prompted, specify the file name and click Save to save it.

Removing a certificate from repository

To delete one or several certificates from the repository, at the certificate repository page, select the corresponding checkboxes, and click Remove Selected.

Adding a certificate to the repository

To add a certificate to repository, click the  Add Certificate icon at the

Domain certificate repository page. The SSL certificate creation page will open. On this page you can generate a self-signed certificate, certificate-signing request, purchase a SSL certificate, and add the certificate parts to an existing certificate.

Generating a self-signed certificate

To generate a self-signed certificate follow these steps:

1. Specify the certificate name.
2. The Bits selection allows you to choose the level of encryption of your SSL certificate. Select the appropriate number from the drop-down list.
3. Select a country from the drop-down list.
4. Specify the state or province, location (city).
5. Enter the appropriate organization name and department/division in the field provided.
6. Enter the Domain Name for which you wish to generate the self-signed certificate.
7. Specify the E-mail address.

8. Click the Self-Signed button. Your self-signed certificate will be immediately generated and added to the repository.

Generating a Certificate Signing Request

To generate a certificate signing request (CSR) follow these steps:

1. Specify the certificate name.
2. The Bits selection allows you to choose the level of encryption of your SSL certificate. Select the appropriate number from the drop-down list.
3. Select a country from the drop-down list.
4. Specify the state or province, location (city).
5. Enter the appropriate organization name and department/division in the field provided.
6. Enter the Domain Name for which you wish to generate the certificate signing request.
7. Specify the E-mail address.
8. Click the Request button. A certificate signing request will be generated and added to the repository. You will be able to add the other certificate parts later on.

Purchasing a Certificate

To purchase a new certificate follow these steps:


1. Specify the certificate name.
2. The Bits selection allows you to choose the level of encryption of your SSL certificate. Select the appropriate number from the drop-down list.
3. Select your country from the drop-down list.
4. Enter your State or Province, your Location (City), Organization Name (Company), organization department (division name)
5. Enter the Domain Name for which you wish to purchase a SSL certificate.
6. Enter the domain owner's e-mail address in the appropriate field.
7. Select the Buy Cert button. You will be taken step by step through the purchase procedure. It is important to note that you must make sure that all the provided information is correct and accurate, as it will be used to

generate the private key.

When using Plesk to purchase your SSL certificate you will receive the certificate file via e-mail from the certificate signing authority. Follow the instructions in the Uploading a certificate file with finding the appropriate private key section to upload the certificate to the repository.

Uploading certificate parts

If you have already obtained a certificate containing private key and certificate part (and may be a CA certificate), follow these steps to upload it:

1. At the certificate repository page, click the  Add Certificate icon. You will be taken to the SSL certificate creation page.
2. In the Upload certificate files section of the page, use the Browse button to locate the appropriate certificate file or a required certificate part.

NOTE

Your certificate can be contained within one or several files, so you may upload the certificate by parts or as a single file, selecting it in several fields (Plesk will recognize the appropriate certificate parts and upload them correspondingly).

3. Click Send File. This will upload your certificate parts to the repository.

You can upload an existing certificate in two ways:

1. Choose a file from the local network and click the Send File button (.TXT files only).
2. Type in or paste the certificate text and private key into the text fields and click the Send Text button.

Uploading a CA certificate

For the certificates purchased through certificate signing authorities other than Verisign or Thawte you will receive what is typically called a CA Certificate, or rootchain certificate. The CA Certificate is used to appropriately identify and authenticate the certificate authority, which has issued your SSL certificate. To upload your CA Certificate, follow these steps:

1. At the certificate repository page, select a certificate from the list. You will be taken to the SSL certificate properties page.

2. Use the Browse button, within the section related to the certificate uploading, to locate the appropriate CA Certificate file.
3. Click Send File. This will upload your CA Certificate to the repository.

You can upload an existing certificate in two ways:

1. Choose a file from the local network and click the Send File button (.TXT files only).
2. Type in or paste the CA certificate text into the text field and click the Send Text button.

Generating a CSR using an existing private key

A situation may occur in some cases, that you have a certificate in the repository, which has only the private key part and the other parts are missing due to some reasons. To generate a new Certificate Signing Request using the existing private key, follow these steps:


1. At the certificate repository page, select from the list a certificate, which has the private key part only. You will be taken to the SSL certificate properties page.
2. Click Request.

Removing a certificate part


After you have uploaded a CA certificate part (rootchain certificate), you are able to remove it. To do so, follow these steps:

1. At the certificate repository page, select a certificate from the list. You will be taken to the SSL certificate properties page.
2. Click on the Remove button located next to the CA certificate field.

Managing Tomcat Web Applications

Plesk supports deploying and managing Tomcat web application in order to enable users to set up hosting with JSP support. Click the  Tomcat icon

on the Domain Administration page, to access the Tomcat Web Applications Management functions:

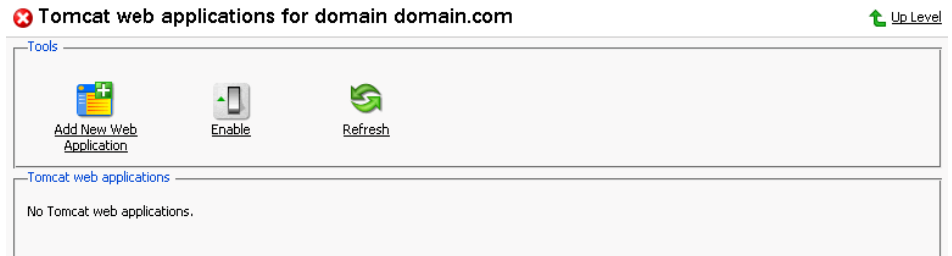






On this page you can activate/deactivate the Tomcat service, upload the Tomcat web application archive files (.WAR files) and remove them, start/stop/restart web applications, and access them.

IMPORTANT

Users can only manage the Tomcat web application through Plesk interface. Managing the web application through the Tomcat manager was disabled in order to maintain coherence of Plesk Tomcat configuration.

The status of Tomcat service and the status of Tomcat web application are represented by the following icons:

Table 3.3. The Tomcat service/web applications status icons

Icon	Meaning
The Tomcat service status	
	means that the Tomcat service is activated
	means that the Tomcat service for the domain is presently deactivated.
The Tomcat web application status	
	means that the web application is activated
	means that this web application is presently deactivated and inaccessible.
	means that web application is inaccessible.


Activating/deactivating the Tomcat service

In order to disable the support of Tomcat web applications the Tomcat service can be deactivated. When the Tomcat service is deactivated, all active Tomcat web applications also change their status to 'inaccessible' while all inactive web



applications remain unchanged.

Activation of the Tomcat service enables access to active web applications.

NOTE


When the Tomcat service is activated, the status icon will change to , and so will the status icons of the Tomcat web applications at this domain that were active before deactivating the Tomcat service.

To activate/deactivate the Tomcat service:

1. Click the  Enable or  Disable icon respectively. The confirmation will appear querying whether you actually wish to change the status of the Tomcat service.
2. Click OK to proceed with changing the status. Clicking Cancel will leave the Tomcat service status unchanged.

Uploading Tomcat web application archive files

To upload a new Tomcat web application archive file, follow these steps:

1. Click  Add New Web Application.
2. Select the web application archive file. Use the Browse button to locate the desired file.

NOTE


Only .war format (Web-application archive) files can be uploaded. The application file cannot be named as manager.war


3. Click OK. The new web application will be uploaded and added to the Tomcat web applications list.


Restarting the web applications



You can restart the Tomcat web applications directly from the control panel. In order to stop, start or restart a web application follow these steps:

1. Select the web application at the Tomcat web applications list on the Tomcat Web Applications Management page.

2. To start the web application: click on the  icon (Start the web application).

To stop the web application: click on the  icon (Stop the web application).

To restart the web application: click on the  icon (Restart the web application).

The current web application state will be marked by an icon:  (ON) for the web application running, and  (OFF) for the web application stopped.

Accessing the Tomcat web applications

A Tomcat web application can be accessed simply by clicking on its name in the Tomcat web applications list. The selected application will be opened in a new browser window.

NOTE

If a web application is disabled, it cannot be accessed, and therefore, the link to it is also disabled.

Removing web applications

You can remove one or several web applications at the same time. To remove a web application(s):


1. Check the checkboxes in the Tomcat web applications list corresponding to the web applications you wish to remove.
2. Click Remove Selected. The Web Application Removal page appears.
3. Confirm the removal, and click OK.

Managing Web Users

A web user is a user account within web server. It is used to define locations for personalized web pages with individual FTP access. The result of creating a web user is a subdirectory within your domain (e.g. `domain.com/~webuser`).

Creating a web user account



To create a new web user account:

1. Click the  Web Users icon on the Domain administration page. The

Web Users page appears:


Web users of domain domain.com [Up Level](#)

Tools

 [Add Web User](#)  [Preferences](#)

Web users

No Web users.

2. Click the  Preferences icon to configure web user access format.

The Preferences page opens:

Preferences [Up Level](#)

Additional Features

Enable webuser@domain.com access format

Allow the web users scripting

* Required fields

3. To allow accessing web user pages via URLs like `webuser@domain.com` select the corresponding checkbox.

Click OK to submit your changes.

4. To add a web user, click  Add Web User. You will be taken to the

Web User Configuration page:

Add new web user of domain domain.com [Up Level](#)

Web user

Web user name	<input type="text" value="Alec"/>
Old password	NONE
New password	<input type="password" value="*****"/>
Confirm Password	<input type="password" value="*****"/>
Hard disk quota	<input type="text" value="200"/> MB <input type="checkbox"/> Unlimited
Apache ASP support	<input checked="" type="checkbox"/>
SSI support	<input checked="" type="checkbox"/>
PHP support	<input checked="" type="checkbox"/>
CGI support	<input checked="" type="checkbox"/>
mod_perl support	<input checked="" type="checkbox"/>
mod_python support	<input checked="" type="checkbox"/>

* Required fields

- Specify the name of the new web user, enter and confirm the password for web user, specify the hard disk quota, and select the available scripting options for the given domain (if permissions granted).

i NOTE

Each web user creates a system account within web server; therefore, you cannot have two web users with identical names on the same server.

You cannot use the reserved system words, such as "mailman" for user names.

i NOTE

Do not use quotes, space and national alphabet characters in the password. The password length should be between 5 and 14 characters and password must not be the same as the login name.

- Once you have completed all entries click OK.

As you create web users, the user names appear listed on the Web Users page.

i NOTE

New web users can access the directory using FTP software by entering the domain name under which the web user account was created and using the appropriate web user name and password.


Editing the web user account properties

To change web user passwords or edit scripting options, click on the user name in the web user list. This takes you to the Web User Configuration page. Follow the same procedure as described above.


Deleting a web user account

To delete existing web users select the users that you wish to delete using the checkboxes, and click Remove Selected. You will be asked for confirmation prior to deleting the selected web users.


Managing Subdomains

You can create and manage subdomains from the control panel. Access the subdomains management functions, selecting the  Subdomains icon on

the Domain Administration page. The subdomains management page opens, listing the subdomains existing under the domain and corresponding FTP account names used for managing them:




Subdomains of domain domain.com  Up Level


Tools

 [Add New Subdomain](#)

Subdomains

Subdomains (1)


 Search  Show All  Remove Selected

Subdomain name ▲	Login	□
dominio.domain.com	ftlogin	 □

To create a subdomain, follow these steps:

1. Click  Add New Subdomain. The Subdomain creation page will

open:

Create a subdomain domain.com  Up Level

Subdomain

Subdomain .domain.com

FTP user Use the same FTP user as that of the main domain
 Create a separate FTP user account for this subdomain

Old password None

FTP Login *

Password

Confirm Password

Hard disk quota MB Unlimited

Apache ASP support

SSI support

PHP support

CGI support

mod_perl support

mod_python support

ColdFusion support

* Required fields

2. Enter the subdomain name in the appropriate field.
3. Select the FTP account user the subdomain is created for: the owner of a parent domain or another individual.
4. Define FTP login, password, and specify hard disk quota if needed.
5. Enable required scripting capabilities to be supported on the subdomain.
6. Click OK.

To open the subdomain URL in browser, click 

To edit hosting account of a subdomain, select the required subdomain name in the list.


To remove one or several subdomains, select them using the corresponding checkboxes, and click Remove Selected.



Managing Protected Directories

This feature is active if virtual hosting has been configured for the domain. It creates and provides password-protected access to the directories where the secure documents reside in the virtual domain. It is possible to create directories under either the standard virtual host accessible via http protocol, or if applicable for the given domain, under the SSL virtual host accessible via https protocol.

To access the protected directories management functions, use the 

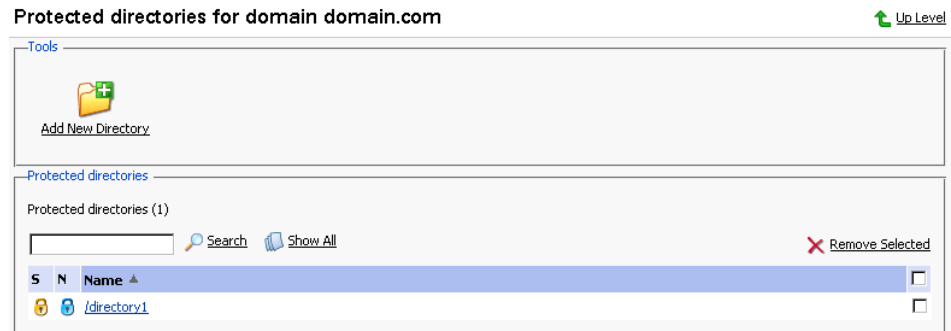Directories icon on the Domain Administration page. The page will open listing all protected directories of this domain:



Each directory name is accompanied by icons, identifying which virtual host type (SSL or non-SSL) the directory resides within:  depicts non-SSL;  depicts SSL.

NOTE

We strongly recommend that you create and change the protected directories through Plesk and not within the FTP program. Plesk may not recognize manual changes.

Creating a protected directory

Follow these steps to create secure directories for the domain:

1. Click  Add New Directory. This takes you to the Protected Directory

Creation page:


2. Enter the name of the protected directory you wish to create in the Directory name field.
3. For Directory Location you can choose a non-SSL, SSL secure directory, or both. Use the appropriate checkboxes to select.
4. Click in the Header Text input box, and enter the header for this directory. When a user tries to access the protected directory, the text in this box displays as the realm they are entering.

- Click OK to complete creation. You will be taken to the list of protected directory users:



- To add a new user, click the  Add New User icon. You are taken to

the new directory user creation page:

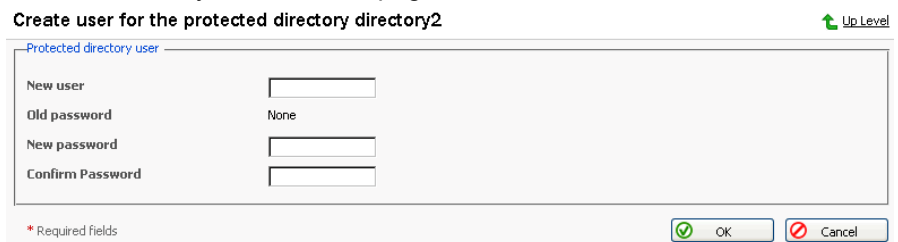

- Specify the user name, password and confirm password.
- Click OK to submit. You will return to the Protected Directory Management page. The new user record will appear in the list of users.
- To remove existing directory users select the users that you wish to remove using the corresponding checkboxes and click Remove Selected. You will be asked for confirmation prior to deletion of the directory users.
- To access a directory user record in order to edit the user password, click on the user name in the list.
- Once you have completed everything within your new protected directory, click OK to submit all changes to the system and to return to the Protected Directory page.

NOTE

An SSL protected directory can be created even if SSL support has been disabled for the domain, however this protected directory will be inaccessible until you enable the SSL support.

Editing the protected directory properties

Follow these steps to edit protected directory properties:

1. On the Protected directories page, click on a title of the directory that you wish to edit. You will be taken to the Protected Directory Management page.
2. Edit the directory properties by following the same steps outlined above, in the Creating a protected directory section.
3. Click OK to submit all changes to the system and to return to the Protected Directories page.

Removing a Protected Directory

To remove one or more directories, follow these steps:

1. Select the checkboxes in the list of protected directories.
2. Click Remove Selected. The Protected Directory Removal page appears.
3. Confirm removal, and click OK.

NOTE

Removing a protected directory in Plesk does not delete the directory off the server, it simply removes the protection. Meaning that the directory and its contents will now be reachable via the Internet without the need for login and password.

Managing Anonymous FTP Access

Within Plesk you can set up Anonymous FTP capabilities for a given virtual host. Anonymous FTP is used to allow an open, yet controlled, environment for visitors to the domain to download and/or upload files to and from the domain account. Users will be able to log into ftp.'domain name' with the standard anonymous user name and any password. Plesk allows the setup and limitation of incoming file space, number of connected users, and bandwidth usage throttling. You should take care when allowing the use of anonymous FTP and be sure to use all the limitation capabilities within the interface wisely. If set up with excessive limits, it could lead to problems with server resources as well as excessive bandwidth usage.


NOTE

You can set up anonymous FTP only for domain that has physical hosting configured on exclusive IP.


To set up Anonymous FTP:

1. Click the  Anonymous FTP icon on the Domain Administration

page. The Anonymous FTP Account Management page appears:

 Anonymous FTP account for the domain domain.com [Up Level](#)


Tools

 Enable

Anonymous FTP


Allow uploading to incoming directory	<input checked="" type="checkbox"/>
Allow creation of directories in the incoming directory	<input checked="" type="checkbox"/>
Allow downloading from the incoming directory	<input type="checkbox"/>
Limit disk space in the incoming directory	<input type="text"/> KB <input type="checkbox"/> Unlimited
Limit number of simultaneous connections	<input type="text"/> <input type="checkbox"/> Unlimited
Limit download bandwidth for this virtual FTP domain	<input type="text"/> KB/s <input type="checkbox"/> Unlimited

* Required fields


2. By default anonymous FTP capabilities are disabled. To activate anonymous FTP select the  Enable icon.
3. Select the checkbox beside Allow uploading to incoming directory to allow visitors to access the anonymous FTP site to upload files into the /incoming directory.
4. To allow users to create nested directories in the /incoming directory, select the Allow creation of directories in the incoming directory checkbox.
5. To allow downloading from the /incoming directory, select the Allow downloading from the incoming directory checkbox.
6. Deselect the Unlimited checkbox in the Limit disk space in the incoming directory field to set the disk space quota (i.e. hard limit) on the /incoming directory. Then enter the amount of disk space, in Kilobytes, you wish to allow for the /incoming directory.
7. Deselect the Unlimited checkbox in the Limit number of simultaneous connections field to set limits on the number of users who can be simultaneously connected to the anonymous FTP site. Then enter the number of connections allowed.
8. Deselect the Unlimited checkbox in the Limit download bandwidth for this virtual FTP domain field to set throttling up for the anonymous FTP site. Then enter the maximum average bandwidth, in Kilobytes per second, allowed.

- Once you have completed all changes, select OK to submit all changes.


Managing Log Files and Log Rotation

Plesk allows managing log files and log rotation settings from the control panel. To access these functions, click the  Log Manager icon on the Domain

Administration page. The Log Manager page will open:

Log files management for domain domain.com  Up Level

Tools





Log Rotation







Preferences

Lines of log file to be displayed (from the end of the file)

Log files


Log files (6)

 Search  Show All  Remove Selected

Modification date	Name ▲	Size	☐
Jan 30, 2004 04:07 AM	access_log	0 B	 <input type="checkbox"/>
Jan 30, 2004 04:07 AM	access_log.processed	294 B	 <input type="checkbox"/>
Jan 30, 2004 04:07 AM	access_ssl_log	0 B	 <input type="checkbox"/>
Jan 29, 2004 04:07 AM	access_ssl_log.processed	0 B	 <input type="checkbox"/>
Jan 29, 2004 07:46 AM	error_log	1.08 KB	 <input type="checkbox"/>
Jan 30, 2004 05:03 AM	error_ssl_log	4.10 KB	 <input type="checkbox"/>

Log files total size: 5.47 KB


At this page, you can perform the following operations:



- Define the number of log file's lines to be displayed at once. To do that, type in the number of lines in the Lines of log file to be displayed input field prior to selecting a log file for viewing.
- View a log file. To this effect, click on a log file's name in the list. The log file contents will be displayed in a separate Log File Viewer window.
- Save a log file on your local machine. To do that, click on the appropriate  icon. After that you will need to specify the location on your local machine and the file name for the downloaded log file to be saved, and then click Save.
- Delete log files. To this effect, select the corresponding checkboxes, and click Remove Selected.

To configure the log rotation preferences, follow these steps:


- Click the  Log Rotation icon on the Log Files Management page.

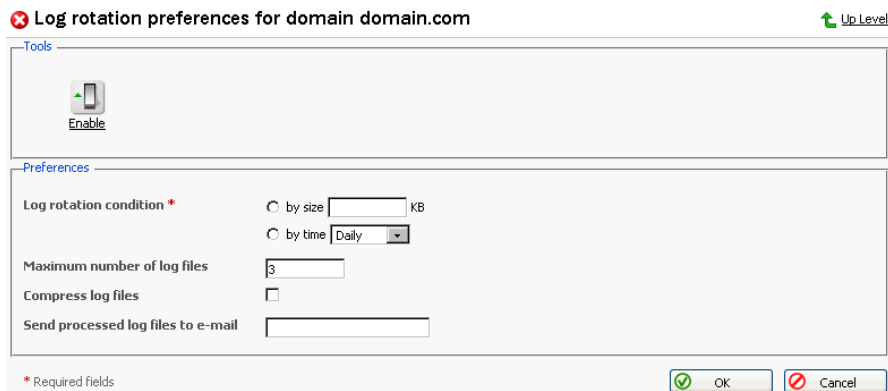The Log Rotation Preferences page will open:



2. Click the  Enable or  Disable icon respectively to enable/disable log rotation.
3. Select the log rotation condition:
 - log file size - enter the size in kilobytes in the appropriate field
 - time - select from the drop-down list. It can be set to **Daily**, **Weekly**, and **Monthly**.
4. Specify the maximum number of log files in the appropriate input field, if desired. The maximum number is the number of processed files to be kept for each log file.
5. Select the Compress log files checkbox to enable compression.
6. If desired, in the Send processed log files to e-mail input field, enter the e-mail address, for the processed log files to be delivered to.
7. Click OK to submit changes.

Scheduling Crontab Tasks

To access the crontab management functions, click the  Crontab

Manager icon on the Domain administration page. The Crontab management page will open:

Crntab tasks [Up Level](#)

Tools

 [Add New Task](#)

Preferences

Show Crontab of:

Send Crontab messages to address:

Tasks

Crntab tasks (1)

S	M	H	DM	M	DW	Command	
	0	12	1	1	1	backup_httpdocs.sh	<input type="checkbox"/>

On this page, you can view scheduled tasks of various system users, set the e-mail address for the crontab messages to be sent, schedule new tasks and remove them.


The Show Crontab of: drop-down box indicates the system user, whose scheduled tasks are currently displayed. It also allows to select another system user to view and/or manage scheduled tasks that belong to that user.

Each line in the Crontab task list represents a single task. The Status (S) column shows whether the selected task is enabled or disabled (the disabled tasks are not executed). The Command column contains the command that is executed within the selected task and serves as a link to the page that allows editing the selected scheduled task properties.



The task list can be sorted by its parameters in ascending or descending order. To sort the task list, click on the name of the sorting parameter. An arrow will show the order of sorting. The sorting criteria are:

- (S)tatus
- (M)inute
- (H)our
- (DM) Day of the Month
- (M)onth
- (DW) Day of the Week
- Command


To add a new task to the list, follow these steps:

1. Click the  Add New Task icon on the Crontab management page.

You will be taken to the crontab record creation/editing page:

 **Editing the Crontab task of ftplogin**  Up Level

Tools

 [Disable](#)

Task

Minute *

Hour *


Day of the Month *


Month *

Day of the Week *

Command *

* Required fields

2. Choose the status of the scheduled task by clicking the  Enable or

 Disable icon. The current status is displayed by the corresponding icon.


3. Specify the date and time for the task to be executed: Minute - enter the value from 0 to 59 or *, Hour - enter the value from 0 to 23 or *, Day of the Month - enter the value from 1 to 31 or *, Month - enter the value from 1 to 12 or *, Day of the Week - enter the value from 0 to 6 (0 is Sunday) or *.
4. Type in the command to be executed in the Command input field.
5. Click OK.

To delete one or several scheduled tasks from the list, select the corresponding checkboxes and click Remove Selected.

To enable crontab to send the messages to a specified e-mail address, enter the e-mail address into the Send crontab messages to address: text input field and click Set. All scheduled tasks from the displayed list that output some information will automatically have their output sent to the specified address. The "" entry in this field specifies that the sending crontab messages option is disabled.

Using File Manager

Once hosting is configured for the domain you can use a file manager to operate domain files and directories.

To access the file manager functions, click the  File Manager icon on the










Domain Administration page. The file manager page will open displaying a root directory structure and contents:

File Manager [Up Level](#)

root (12)

Search Show All Create file Create directory Copy/Move Touch Remove Selected



T	Name ▲	Size	Change date	User	Group	Permissions	
	anon_ftp	4.00 KB	Jan 28, 2004	ftplugin	psaserv	750	
	bin	4.00 KB	Jan 28, 2004	root	psaserv	755	
	cgi-bin	4.00 KB	Jan 28, 2004	ftplugin	psachn	755	
	conf	4.00 KB	Jan 30, 2004	root	psaserv	750	
	error_docs	4.00 KB	Jan 28, 2004	ftplugin	psaserv	755	
	httpdocs	4.00 KB	Jan 30, 2004	ftplugin	psachn	751	
	httpsdocs	4.00 KB	Jan 30, 2004	ftplugin	psachn	751	
	pd	4.00 KB	Jan 30, 2004	root	psaserv	750	
	private	4.00 KB	Jan 28, 2004	ftplugin	root	700	
	statistics	4.00 KB	Jan 28, 2004	root	psaserv	550	
	subdomains	4.00 KB	Jan 30, 2004	root	psaserv	755	
	web_users	4.00 KB	Jan 29, 2004	root	psaserv	755	

- To browse a directory, click the  icon or directory name.
- To change permissions for a directory or a file: click on the corresponding permission set in the Permissions column. The permissions settings page will open, allowing you to set the required permissions for all users. Select the desired settings using the checkboxes, then click OK to submit.
- To rename a directory or file, click on the corresponding  icon. A new page will open allowing you to rename the selected file or directory. Type in a new name and click OK.
- To copy or move a file or directory to another location, select the required file or directory using the corresponding checkbox, and click  Copy/Move. You will then need to specify the destination for the file or directory to be copied or renamed to. Then click Copy to copy, or Move to move it.
- To change a timestamp of a directory or file, click on the  Touch icon. The time stamp will be updated with the current local time.
- To remove a file or directory, select the corresponding checkbox, and click Remove Selected.
- To upload a file to the current directory, click  Create File, then specify its location. Click OK.
- To create a file, click  Create File, then type in a file name in the corresponding field, check (uncheck) the "html template" box, and click OK.
- To create a subdirectory that will be nested in the current directory, click  Create Directory, then type in the directory name in the Directory name field, and click OK.
- To edit a file, click the corresponding  icon. The File Manager's editor window will open, allowing you to edit the file source. After you are done with editing, click Save to save the file, Save and Exit to save the file and quit the file editing mode, Cancel to cancel editing mode and return to the FileManager panel, or Reset to discard the alterations made.
- To edit a file in the WYSIWYG editor, click the corresponding  icon.

Using the Domain Application Vault

The domain application vault function enables you to install various applications on domain and view the properties of the already installed applications.

Installing application on domain

1. Select a domain with configured physical hosting and click the  Application Vault icon on the Domain Administration page.
2. Click the  Add Application icon. The application installation wizard

will open:

Installation: select the application to be installed

[Up Level](#)


Site Application Packages


Site Application packages (2)

Search [Show All](#) Target domain: [Install](#)

Name	Version	Release	Instances	Size	Description		
Mambo	4.5	Stable	0	3.26 MB	Mambo is an Open Source CMS system.	?	C
osCommerce	2.2ms2	1	0	3.56 MB	osCommerce is an online shop e-commerce solution. Its feature packed out-of-the-box installation allows store owners to setup, run and maintain their online stores with minimum effort.	?	C

3. Select the application package you wish to install on the selected domain. Note: you can also choose to install it on a subdomain – select it in the Target domain drop-down menu.

You can view information on available application packages by clicking on the application package name in the list. If there is a documentation available for the application, it will be accessible through the icon .


4. Click  Install.
5. Some applications require certain parameters be entered before executing the installation. Click Finish once you are done editing the required parameters.

Note: It is not allowed to install one application into a sub-directory of another application. However, most applications allow installing several copies for the same domain but in different directories.

When the installation of the application is complete, the application will appear on the Applications list:


Management of installed Site Applications for domain Up Level




Tools


 Add Application


Site Applications

Site Applications (1)

Search  Show All Remove Selected


Name	Version	Release	Target domain	Directory	Size	Description			
osCommerce	2.2ms2	1	 domain.com	osCommerce	3.35 MB	osCommerce is an online shop e-commerce solution. Its feature packed out-of-the-box installation allows store owners to setup, run and maintain their online stores with minimum effort.			<input type="checkbox"/>

To edit the parameters of an application, click on the corresponding icon .

Use the  icon in the Applications list to access the URL of the application.



To remove one or several applications, in the list of applications select the corresponding checkboxes and click Remove Selected.

Accessing Site Builder

Plesk is shipped with Mambo site builder software intended to simplify the process of creating and deploying web sites. In order to use the site builder, you need to have the PHP support enabled for the domain set-up on physical hosting. You can set it up to work via HTTP or HTTPS protocol. The application can be installed on the domain and configured either via Domain Application Vault or using the installation procedure invoked when you click on the Site Builder icon for the first time. After the application is installed and configured, use the  Site Builder icon on the Domain administration page to access

it.


Accessing Microsoft FrontPage Web Administrator

You can access the Microsoft FrontPage Web Administrator directly from the Control Panel, using the  FP Webadmin icon, or  FP-SSL

Webadmin if you wish to access it over secure SSL connection. These icons are located at the bottom of the Domain Administration page, provided that hosting is set up for the domain, and Microsoft FrontPage is available. Note, that the FrontPage Web Admin software should be installed and configured properly for this function to work, and the FrontPage and FrontPage over SSL support should be enabled within Plesk.

Backing Up and Restoring Domains

You can back up and restore domain data by the control panel means, provided that the backup utilities are installed on server.

To access the backup/restore functions, on the Domain administration page, click the  Backup icon. The Backup files repository page opens

displaying the stored domain backup files and their properties:

Backup files repository  Up Level

Tools

 [Create Backup](#)

Upload backup file

Backup files


Backup files (1)

 Remove Selected

Modification date	Backup file name	Size	<input type="checkbox"/>
Sept 30, 2003 12:25 AM	recent_backup	0	<input type="checkbox"/>

Total size: 0

To view the properties of backed up domain click the backup file's name.

To save a backup file on your local machine, click the corresponding  icon.

After that you will need to specify the location on your machine and the file name for the downloaded backup file to be saved, and then click Save.

To delete one or several backup files from the repository, select the corresponding checkboxes and click Remove Selected.

To upload a backup file to the server, specify file location using the Browse button, then click Upload.

To back up the domain data, follow these steps:

1. Click the  Create Backup icon on the Backup files repository page.

The Backup file creation page appears:

Backup file creation [Up Level](#)

Preferences

Backup file name *

create backup file
 do not store the backup file in repository, only download it

Comments *

Notify by e-mail

* Required fields

2. Specify the backup file name.


Select the create backup file option, and type in your comments in the Comments text field.

To download a backup file to your local machine without storing it in the backup repository, select the "do not store the backup file in repository, only download it" option.

If you wish Plesk to notify you of the backup progress, enter your e-mail into the "Notify by e-mail" field, and select the checkbox for activating this function.

3. Click Back Up.

To restore a domain, follow these steps:

1. Click the  Backup icon at the Domain administration page. The Backup files repository page appears.
2. Select the desired backup file from the list clicking on its file name. The backup file information page will open displaying the domain configuration

View the backup information for domain domain.com

[Up Level](#)

[Dump information](#)

IP address	192.168.42.140
Subdomains	0
Databases	0
Web users	0
Mailboxes	0
Mail redirects	0
Mail groups	0
Mail autoresponders	0
Mailing lists	0
Web applications	0

[Comments](#)

The latest domain backup

[Restoration parameters](#)

Notify by e-mail

IP address for restoration:

* Required fields

3. If desired, enter an e-mail and select the checkbox to enable the notification.

Select the IP address to be used for restoring the domain data.

4. Click Restore.

 NOTE

During backup/restore processes, the domain is automatically switched off and all of its services are unavailable.

Appendix A. Glossary of Terms

APACHE

Apache is an open source Web server that is distributed free. Apache runs on Unix-based operating systems (including Linux and Solaris) and Windows 95/98/NT. Apache was originally based on the NCSA server, but is now an independent product, supported by the nonprofit Apache Software Foundation.

BROWSER

A browser is a software application that lets you access information on the Internet. Browsers can read HTML and send HTTP or FTP requests for services on the Internet. Browsers are usually associated with the World Wide Web portion of the Internet.

CGI

CGI, or the common gateway interface, provides a standardized method for Web servers to send a user request to an application and to receive information back for the user. For example, when you click on a URL link, the Web server sends the requested page to you. CGI is part of the HTTP protocol. CGI works in many different languages, and across several different platforms.

CLIENT

A client is a company or individual requesting services from an Internet presence provider. A client is a customer of a Web hosting company, or a user of Internet services. In hardware terminology, a client is a computer system or a software package that requests services or information from another application that resides across the network. Think of the client as your PC or workstation, through which you access programs and data across a network or the Internet, usually on a server. In very simple terms, a client is a user.

DB WebAdmin

DB WebAdmin is a web-based administration tool that allows to manage a whole MySQL server as well as a single database.

DNS

DNS, short for Domain Name System, is a distributed database that maps names and IP addresses for computers using the Internet. DNS is a standardized system that identifies domain name servers.

DOMAIN

A domain is a virtual address on the Internet for any organization or entity. Technically, a domain is a group of networked computers (servers) that represent an organization and provide network services. However, several domains could reside on one server, in dedicated space provided by a Web hosting service. To the Internet user, a domain appears as space on one server, regardless of the implementation. Domains are identified by their familiar Internet URL (uniform resource locator) addresses. For example, `www.sw-soft.com` is the name of the domain where SWsoft information resides on its servers. Syntactically, a domain name is a string of names or words separated by periods. For example, a domain name such as:

hello.house.neighborhood.com includes the names of:

- the host: hello
- the subdomain: house
- the domain: neighborhood
- the organization type: com

Some top-level domain names:

- arpa: ARPAnet (a Defense Department communications system that established the Internet)
- com: Commercial, for-profit organizations and businesses
- edu: Educational institutions
- gov: Government organizations
- int: International organizations
- mil: U. S.-based military
- net: Internet access providers
- org: Non-profit organizations
- aero: Air-transport industry
- biz: Businesses
- coop: Cooperatives
- info: Information
- museum: Museums
- name: For registration by individuals
- pro: Accountants, lawyers, physicians, and other professionals
- 2-alphabetic characters: the country code top-level domains (ccTLDs), such as, for instance .uk for United Kingdom.

FTP

FTP, or File Transfer Protocol, is a method used to transfer files to (upload) and from (download) a remote server. You can use the FTP command to:

- Copy a file from the Internet to your PC
- Move a file from your PC up to the Internet

-
- Rename an existing file
 - Delete a file
 - Update an existing file with more recent data

GATEWAY

A gateway is a combination of hardware and software allowing dissimilar systems to communicate by filtering data through standardized protocols. Think of a gateway as a translator that allows your PC to talk with other computers on the network.

HOST

In a network, a host is usually a computer that stores software applications and data that may be accessed or retrieved by other users. But a host can be any addressable device on the network, not just a computer. The host provides services to other computers or users. An Internet Service Provider may also be referred to as a Web hosting company.

HTML

HTML, or HyperText Markup Language, is a standardized language for presenting information, graphics, and multimedia on the World Wide Web. HTML consists of hundreds of codes, tags, and symbols that define the type of information and how it should be displayed in a browser. HTML is universally understood on a wide variety of platforms.

HTTP

HTTP, or HyperText Transfer Protocol, is a standard for sharing World Wide Web files. HTTP lets you communicate across the Internet by carrying messages from your browser to a server.

IMAP

IMAP, or Internet Message Access Protocol, is a method for receiving e-mail messages from other Internet users on your local server. IMAP lets you see message headers before choosing and viewing the entire text of mail messages. You can selectively retrieve mail messages with IMAP. Compare IMAP to the POP and SMTP mail protocols.

IP ADDRESS

An IP address (Internet Protocol address) is an internal number that identifies a host on the Internet or a network. IP numbers are invisible to end users, replaced in your user interface by the more familiar domain names and URLs.

IP POOL

IP address pool is the range of available IP addresses.

MAIL AUTORESPONDER

Mail autoresponders are automatic replies to email sent to a particular mail name. Autoresponders can

include both a text message and attached files. This mail function is often used on mail accounts for individuals who are away for a certain period of time, or are unable to check their mail for any number of reasons.

MAIL GROUP

Mail groups are used for sending e-mail to a group of people through one address rather than to each individual address. Mail groups save you time and effort in reaching several people at once; you only have to create one e-mail message to the group, rather than several identical messages to everyone.

MAILMAN

Mailman is software to help manage email discussion lists, much like Majordomo and SmartList. Unlike most similar products, Mailman gives each mailing list a web page, and allows users to subscribe, unsubscribe, etc. over the web. Even the list manager can administer his or her list entirely from the web. Mailman also integrates most things people want to do with mailing lists, including archiving, mail-to-news gateways, integrated bounce handling, spam prevention, email-based admin commands, direct SMTP delivery (with fast bulk mailing), support for virtual domains, and more. Mailman runs on most Un*x-like systems, is compatible with most web servers and browsers, and most SMTP servers.

MAIL REDIRECT

Mail redirects are used to forward or redirect email from one POP3 mailbox to another email address. By creating an email redirect or alias, messages are sent to a different email box without the sender needing to know the new address. Email can be redirected to an address outside the domain.

MySQL

SQL is a Structured Query Language that was created as a standardized method of defining, manipulating, and searching data in a database. It is currently the most commonly used database language. MySQL is a fast, easy-to-use, multi-user SQL database server in a standard client/server environment. MySQL handles graphics as well as text. For more information, visit <http://www.mysql.com>.

NETWORK

A network is a system of interconnected computers and peripheral devices (such as printers).

PACKET

Data that is transported across the Internet is divided into small, manageable units called packets. Data packets can be sent more quickly and efficiently across a network than the full stream of data in a message or file.

PERL

Perl is an interpreted high-level programming language. Perl is very popular among System Administrators who use it for a vast number of automation tasks. Many CGI programs are written in Perl.

PHP

PHP (originally meaning Personal Home Page) is a server-based HTML embedded scripting language that

runs on multiple platforms, primarily on Linux servers. PHP accesses and manipulates data in a MySQL database, and helps you create dynamic Web pages. You write HTML and embed code in the HTML that performs a specific function. The embedded code is the PHP portion of the script, identified in the HTML by special start and stop tags. A PHP file has an extension of .php or .php3 or phtml. All PHP code is executed on a server, unlike a language such as JavaScript that is executed on the client system. For more information, visit <http://www.php3.org>.

POP3

POP3, or Post Office Protocol Version 3, is a method used to receive electronic mail across the Internet, accommodating different mail software packages and systems. POP3 receives and holds all your e-mail on a server. You can then download all your messages when you connect to the mail server; you cannot selectively retrieve messages. Compare POP to the IMAP mail protocol.

POSTGRESQL

PostgreSQL is an open source database system, that began as an enhancement to the POSTGRES research prototype DBMS. Where POSTGRES used the PostQuel query language, PostgreSQL uses a subset of SQL.

PROTECTED DIRECTORY

A directory is an organized collection of files and subdirectory folders on a computer. A protected directory is one that cannot be accessed by all public users; you must have access privileges to read information in a protected directory.

PYTHON

Python is an interpreted high-level programming language. You can write web-based applications in Python that will run many times faster than traditional CGI and will have access to advanced features such as ability to retain database connections and other data between hits and access to Apache internals.

QMAIL

Qmail is a secure and highly reliable e-mail message handling system. It replaces the sendmail daemon on Unix and Linux systems. Qmail is fast and uses little memory. Users can create their own mail lists, and system administration is minimal. Qmail uses the Simple Mail Transfer Protocol (SMTP) for message exchange with other systems.

REBOOT

Rebooting simply means restarting a computer. You should not reboot a server that has users accessing it until you have informed the users that the server must be shut down temporarily. Sometimes, an emergency necessitates rebooting a server immediately, but it is not a recommended practice.

SECURE HTTP

Secure HTTP (S-HTTP or HTTPS) is an encryption method uses to protect documents on the World Wide Web. An alternative to S-HTTP is an SSL certificate (or Secure Socket Layer) that secures an entire session, not just a document or a file. S-HTTP supports several different message encryption formats, and

works with any communication between clients and servers.

SECURITY

There are several different ways to control access to a computer or network, to protect proprietary data, and to maintain privacy. Security measures can be defined at several different levels (at the server level, on a directory, for an individual file, etc.) for optimum protection.

SERVER

A server is a computer system (a combination of hardware and software) that runs programs, stores files, directs traffic, and controls communications on a network or the Internet. Clients (also called users or workstations) access a server for specific information and services.

SHARED IP

An IP address that can be used for hosting by several clients.

SKELETON DIRECTORY

In Plesk, this term refers to a set of directories and files that get copied into a newly created virtual host directory structure at the time the virtual host is created. It may be used to have a set of CGI scripts included with every account created in Plesk. It is very useful if you are looking to have a more informative, customized welcoming index.html page, and it is also helpful if you have anything else that needs to be included by default within the directories of the virtual host.

SMTP

SMTP, or Simple Mail Transfer Protocol, is a standard for transmitting mail messages across different computers on a TCP/IP network. SMTP can only be used when both the mail sender and receiver are ready. If the destination PC is not ready, a 'post office' must temporarily store the mail. In that case, a post office protocol such as IMAP or POP is used to retrieve the mail.

SSI

SSI stands for 'server-side includes', a type of HTML comment that directs the webserver to dynamically generate data for the Web page whenever information is requested. SSIs can also be used to execute programs and insert the results; therefore they represent a powerful tool for web developers.

SSL

SSL stands for Secure Socket Layer, and is a set of rules used for exchanging information between two computer devices using a public encryption system. SSL establishes secure communications between servers and clients. SSL provides a safe and authenticated method of handling e-commerce transactions. Only authorized users can access and read an SSL-encrypted data stream. An alternative to SSL is Secure HTTP (S-HTTP), used to encrypt World Wide Web documents (rather than securing an entire session, as does SSL).

SSL CERTIFICATE

An SSL certificate is an electronic key that encrypts transmissions between two computers on a public

network, providing privacy and security to the session. Think of an SSL certificate as an electronic ID card for an individual or a computer service. An SSL certificate confirms that a message that you receive actually did come from the person identified. The certificate key is issued by a third party. SSL certificates are used for secure e-commerce communications, protecting information such as credit card numbers and personal data. You can generate an SSL certificate with a utility such as SSLeay. Then, submit it to a certificate authority such as GeoTrust, Inc (www.geotrust.com).

TCP

TCP stands for Transmission Control Protocol, and is the primary data transport protocol on the Internet. TCP transmissions are fast, reliable, and full-duplexed.

TCP/IP

Transmission Control Protocol/Internet Protocol, commonly known as TCP/IP, is a data transmission protocol that was developed by ARPA, the Advanced Research Projects Agency. ARPA is the founding organization of the Internet.

TELNET

Telnet is a method of accessing another remote computer. You can only access the other computer if you have permission to do so. Telnet differs from other protocols that simply request information from a host computer, because it actually logs you on to the remote computer as a user.

TOMCAT

Tomcat is a server solution based on the Java Platform that supports the Servlet and JSP specifications. Managed by the Apache Jakarta Project, it is developed in an open and participatory environment.

URL

A URL is a Uniform Resource Locator used to identify an organization or domain on the Internet. URLs are standardized names that are typically found on the World Wide Web portion of the Internet. URL addresses identify domains on the network. Read about Domains for more detail.

USER

Simply put, a user is a client. In hardware terminology, a client is the PC that you use to access information from other computers (usually servers) on the Internet or network.

WEBMAIL

WebMail is a Web based interface to Unix system mailboxes. It allows a user to access and administer his IMAP/POP3 mailbox via the world wide web.

WEB USER

A web user is a user account within Apache that is used to define locations for personalized web pages with individual FTP access.

WORKSTATION

A workstation is a user or client that accesses information from other computers (usually servers) on a network.